


Different Seam Widths:


1. A standard seam allowance is _____.

2. Refer to the illustration at the right. The distance from the middle of the presser foot to the outside edge is approximately _____.

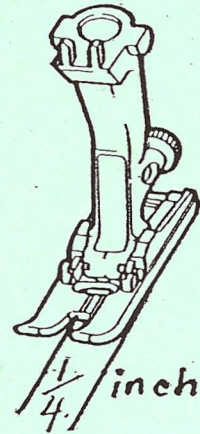

3. Where do you check to see what seam allowance or width you should take?

4. Refer to the picture of the stitch plate below. Label the lines you would use as a guide if you wanted the following seam allowances: $1/4$, $3/8$, $1/2$, $5/8$, $3/4$. (Measure from the hole where the needle goes down into the fabric.)

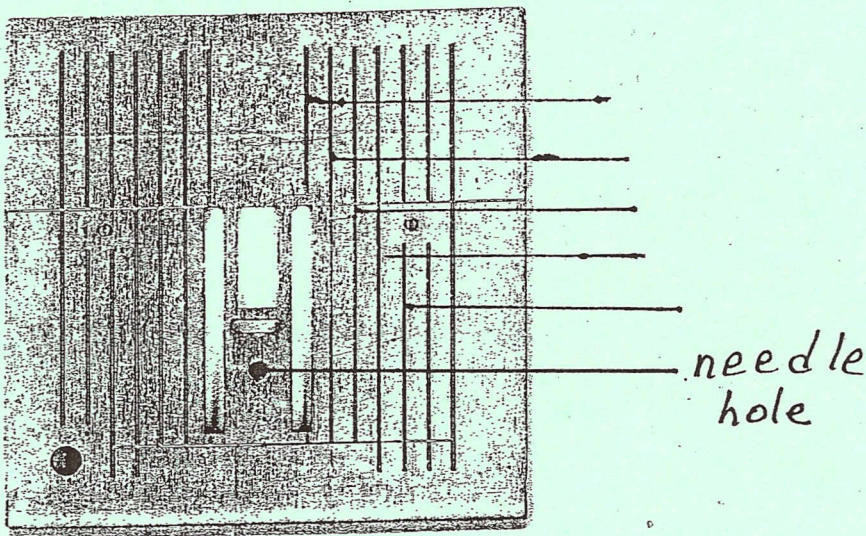

5. When you sew a seam, place _____ sides together.

6. Sew a sample by following the directions on the backside of this paper.

